


A19LED802-6PK

CRI 80 5000K 800 Lumens LED A19



The high performance LED A19 architectural form and versatility to make it an excellent choice for new construction or retrofit applications.

Performance



- LED A19 is designed to provide 15,000 hours of life
- Energy-saving & Super bright, saving 80% energy compared
- UL, for Dry location use

Construction

- Aluminum for excellent heat dissipation

Installation

- Size: $\Phi 2.36$ "(60mm)*H4.17"(106mm)

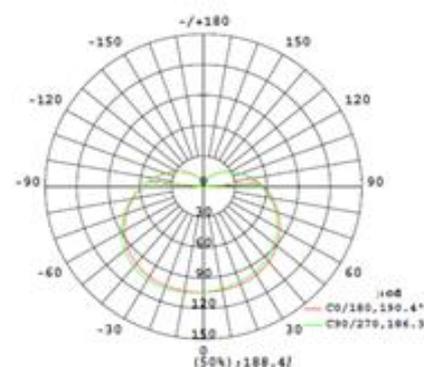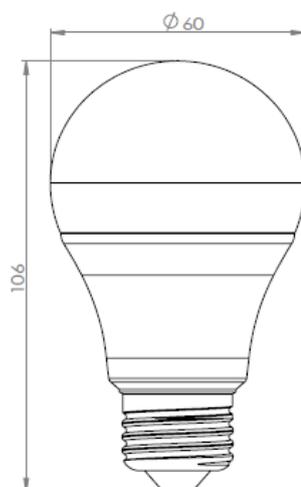

Specifications

Category	Light Bulb	Individual Box Weight per Unit (LBS)	0.12
Shape	A19	Inner Package Length (Inch)	7.44
Bulb Base Type	E26	Inner Package Width (Inch)	4.92
Bulb Base Finish	NO	Inner Package Height (Inch)	5.04
Color Temperature	5000K	Inner Package Weight Per Unit (Lbs)	1.8
Beam Angle	160°	Inner Package Quantity	6
Finish	White		
CRI	80		
Average Life (Hours)	15000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	1.2		
Life Based On 3Hrs/Day (Years)	13.6		
Product Length (Inch)	N/A	Lamp Type	LED A19
Product Width (Inch)	2.36	Bulb Shape	A19
Product Height (Inch)	4.17	Dry/Wet/Damp	Dry
Product Extension (Inch)	N/A	Energy Star	N/A
Product Weight Per Unit (Lbs)	0.01	Power Factor	0.7
Dimmable	NO	Current	130mA
Watts	10W	Lumen/Watt	81
Watt Equivalent	60W	Warranty (Year)	3
Lumens	800	DLC (Yes/No)	NO
Certification (UL/ETL/FCC)	UL	Input Voltage	120V/60HZ
Individual Box LENGTH (INCH)	2.38	Housing Material	Aluminum+PC
Individual Box Width (INCH)	2.38	Lens	PC
Individual Box HEIGHT (INCH)	4.84	Led Type	Bridgelux 2835